


Model 102

T-1 Panel Mount Front Re-Lampable Incandescent

102-S (Standard Body)

Suggested mounting diameter 1/4"


Utilizes the extremely reliable T-1 Midget Flanged-Based incandescent bulb. Recommended for installation where indicator lights must be mounted close together. An internal silicone rubber pressure pad maintains electrical contact inside the lamp body. Because of its high spring rate, the pad cannot take a permanent set. It also provides an effective front-to-back moisture seal.



102-SI (Insulated Body)

Suggested mounting diameter 5/16"

This two-terminal version of the basic 102 Model. Special insulating hardware prevents moisture from leaking through the panel mounting hole. Electrical contact with the indicator light body is made by means of a solder lug.

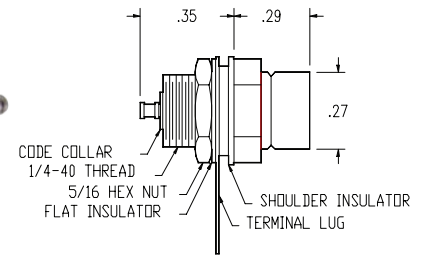

All dimensions are in inches.

Lens Styles

Clear anodized bezel allows 180 1/2 visibility.	Q	
Same as Q lens except with black anodized bezel.	QB	
Clear anodized bezel prevents sidelight emission.	DSC	
Same as DSC lens except with black anodized bezel.	DS	
Full 180° visibility and maximum illumination.	STD	
White dome lens. 1/2" diameter.	700363	

Lens Colors Nylon		Lens Colors Lexan	
Translucent	Transparent	Translucent	
R - Red	RTP - Red	RTL - Red	
A - Amber	ATP - Amber	ATL - Amber	
G - Green	GTP - Green	GTL - Green	
B - Blue	BTP - Blue	BTL - Blue	
W - White	CTP - Clear	WTL - White	

HOW TO ORDER

Example:

102	-	S	-	STD	-	R	-	FB 44*
MODEL NO.		BODY STYLE		LENS STYLE		LENS COLOR		LAMP

*See Incandescent Lamp spec sheet.

5725 Olivas Park Drive • Ventura, California 93003
 805.676.3200 • 805.676.3206 Fax
 info@SloanLED.com • SloanLED.com

