



60W4 12 VDC Power Supply


Installation Guide for PN 701507-60W4 – NEC Class 2 Output

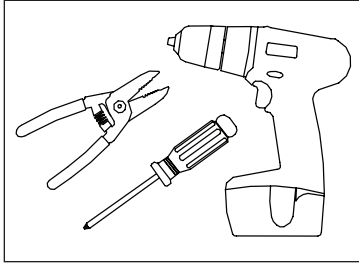


1. **Tools required:** Wire strippers, drill, and screwdriver.

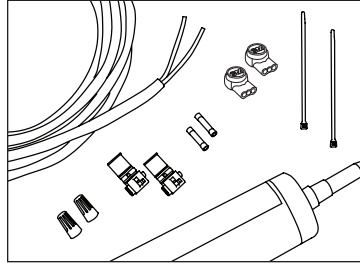

2. **Supplies required:** Junction box, #8 or #10 pan head screws, UL Listed PLTC cable, UL Listed electrical wire connectors (e.g., wirenuts), silicone.

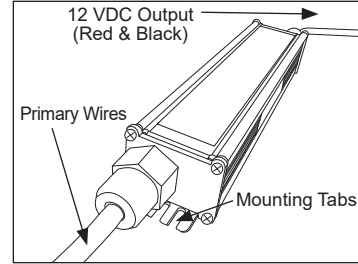


3. **Power Supply:** Identify primary wires, secondary wires, and location of mounting tabs.

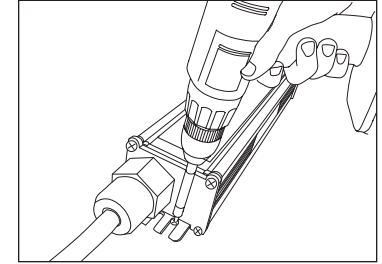


4. **Mount Power Supplies:** Use mounting tab in corner to secure power supply.

Sample Configurations



Dry Location




Wet Location

NOTE: Power supply operating temperature is -40°C to 60°C . To ensure adequate ventilation, mounting power supplies without a secondary enclosure is recommended. Space power supplies by standard knockout locations 0.75" (19 mm) minimum. If two or more power supplies are used, spacing must be at least 1.00" (25 mm) end-to-end, and 4.00" (102 mm) on each side. Power supply spacing to thermoplastic, wood, fiber, or other combustible enclosure materials must be 1.00" (25 mm). Ensure power supplies are not overloaded by verifying output current is less than 5 DC Amps. Use of photo-cells or timing device is recommended to ensure power supplies are off during day light hours, when sign illumination is not needed. Higher daytime temperatures and unnecessary operation may shorten power supply lifetime.

5. **Configure Power Supplies:** Secure power supplies to junction box using 0.50" (13 mm) locknuts. Power supplies may be joined together in a wide array of configurations. For wet locations use a junction box that is UL Listed for wet locations. For dry locations, use any UL Listed junction box.


60W4 12 VDC Power Supply

Installation Guide for PN 701507-60W4 – NEC Class 2 Output

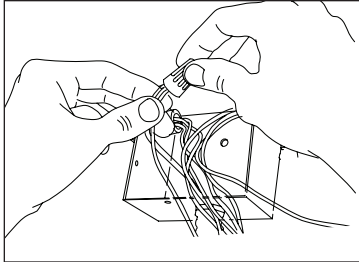

6. Connect Primary:

CAUTION: Have a licensed electrician connect primary.

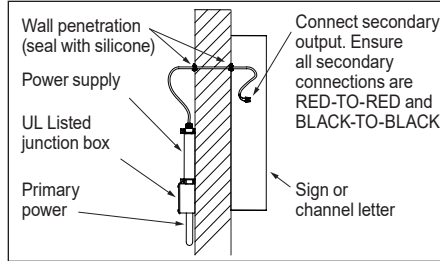

7. Make secondary connections: Secondary class 2 cables do not require conduit per NEC 2008 Articles 725.121 through 725.130. Seal all wall penetrations with silicone to avoid water damage.

TROUBLESHOOTING

If sign is not functioning properly, check the following:

- Primary voltage is between 120-277 VAC
- Secondary voltage is 12 VDC
- Output current is 5 Amps or less
- Power supply is not overloaded (see Power Supply Capacity Chart in product installation guide or SloanLED.com)
- There are no shorts in secondary wiring
- All secondary connections are RED-TO-RED and BLACK-TO-BLACK

UL File number: E336107 UL8750
E215393 UL879

SloanLED products carry a limited warranty.

For complete details refer to the warranty policy found at SloanLED.com

Some or all of the products shown are covered by U.S. and foreign patents pending and covered by one of more of the following U.S. patents issued: 6776504, 6969179, 7192157, 6932495, 7241031



Customer service and technical support

SloanLED Headquarters

5725 Olivas Park Drive, Ventura, CA, USA
888.747.4LED (888.747.4533) • info@SloanLED.com

SloanLED.com

P/N 403042 Rev A 2022-06-30

SloanLED Europe b.v.

Argonstraat 110, 2718 SN Zoetermeer, NL
+31 88 12 44 900 • europe@SloanLED.com

