

Model 855

T-1 3/4 Panel Mount Front Relampable Incandescent or LED

Model 855-S (Standard Body)

Among the outstanding features of the 855 Series are: Small Mounting Size, Front Bulb Servicing, and Interchangeable Lens Assemblies. Contact pressure is maintained by a silicone rubber pressure pad. Pressure pad seals out moisture front to back. Uses T-1 3/4 Midget Flange Based bulb, Incandescent bulb or LED.















Model 855-SI (Insulated Body)

The 855-SI Model is the two-terminal version of the 855-SI Model. The body is insulated from the panel (or case) by insulating washers. Electrical contact with the body is made through a solder lug. Designed specifically to use T-1 3/4 Midget Flange Based Bulbs, Incandescent or LED.




Lens Styles

Clear anodized bezel allows 180½ visibility.	Q		Same as M lens except with black anodized bezel	MB	
Same as Q lens except with black anodized bezel.	QB		Skirted lens covers metal parts for neat panel appearance Large lighted surface assures positive indication.	D	
Clear anodized bezel prevents sidelight emission.	DSC		Edgelight for plastic panels. Small diameter light gasket minimizes wasted panel space.	SE	
Same as DSC lens except with black anodized bezel.	DS		DIMMER: Rotating outer collar changes light output from full to minimum. Rotation to dim can be clockwise or counter-clockwise. Easy adjustment.	DDS	
Full 120° visibility and maximum illumination.	STD		UNLIMITED: Has no lens to diminish light output. Specifically suited to T-1 3/4 flanged based LED for maximum light output.	U	
Large lens for maximum visibility from all angles. Engineered to offer the most uniform light distribution. Full 180° visibility.	M		ILLUMINATOR: Slot on one side emits light for illuminating copy on mounting surface. Available with metal front preventing outward illumination, or with colored lens for easy item identification.	I	


Model 855

T-1 3/4 Panel Mount Front Relampable Incandescent or LED

Lens Colors General Purpose	Lens Colors Lexan	
Translucent	Transparent	Translucent
R - Red	RTP - Red	RTL - Red
W - White	*BTP - Blue	WTL - White
*B - Blue	GTP - Green	*BTL - Blue
G - Green	ATP - Amber	GTL - Green
A - Amber	CTP - Clear	ATL - Amber

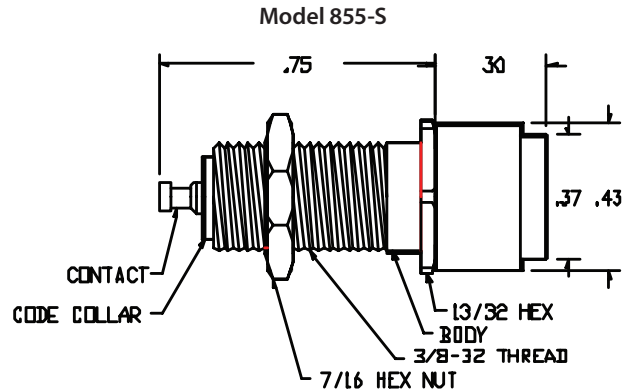

All dimensions are in inches.

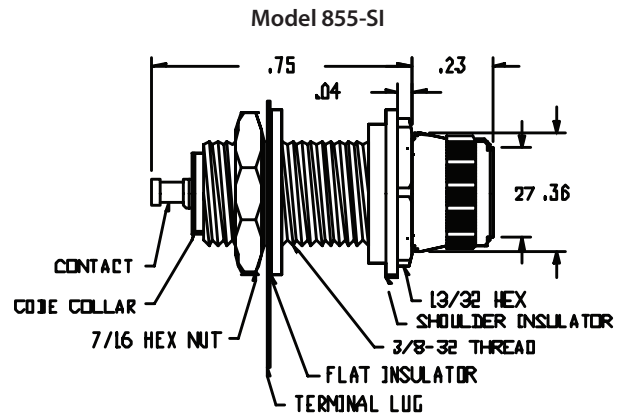

All dimensions are in inches.

Legend for Lens Dimension				
Lens	Height		Lens Dia.	Bezel Dia.
	S	SI		
STD, I	5/16	11/32	17/64	3/8
D	21/64	3/8	3/8	1/2
DS, DSC, Q, QB	23/64	25/64	23/64	7/16
M, MB	5/8	21/32	7/16	1/2
SE	27/64	15/32	-	1/2
DDS	25/64	7/16	-	3/8
U	15/64	17/64	-	3/8

HOW TO ORDER

Example:

855	-	S	-	DSC	-	5**	-	GTL	-	327
MODEL NO.		BODY STYLE		LENS STYLE		COLOR CODING		LENS COLOR		LAMP

*Not recommended for LEDs

**Color Collars are available in choice of EIA colors to simplify wiring by color coding.