



Quantum 12/100 Power Supply

PAGE 1 OF 2


Installation Guide for PN 701507-100E1

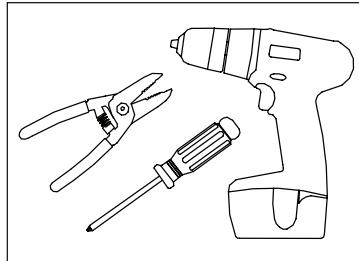


1. Tools required: Wire strippers, drill, and screwdriver.

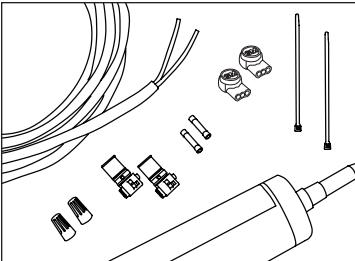


2. Supplies required: Electrical enclosure for power supply, M4 pan head screws, PLTC cable, silicone, 3M™ Scotchlok™ connectors.

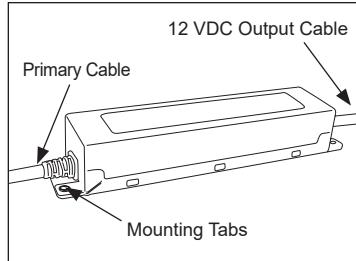

3. Power Supply: Identify primary wires, secondary wires, and location of mounting tabs.

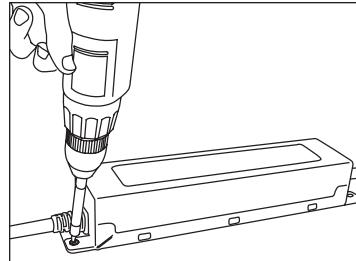

4. Mount Power Supplies: Use mounting tab in corner to secure power supply.

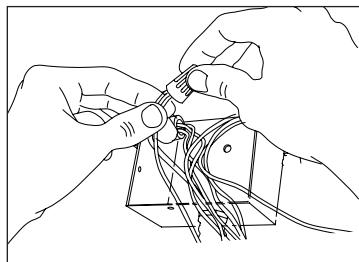

5. Connect Primary:

CAUTION: Have a licensed electrician connect primary.

NOTE: Ensure adequate ventilation. Power supply operating ambient temperature is -40° to 60° C. Power supply may be mounted in an enclosure (i.e., transformer can/raceway). Power supply spacing to thermoplastic, wood, fiber, or other combustible type enclosure materials shall be 25 mm. Two or more adjacent power supplies shall not be mounted closer than 25 mm end to end or 102 mm side to side. Ensure power supplies are not overloaded by verifying output current is less than 8.33 DC Amps. It is recommended to use photocells or light sensors to prolong life of power supply and to keep unit at maximum operating efficiency.

Quantum 12/100 Power Supply

Installation Guide for PN 701507-100E1

TROUBLESHOOTING

If sign is not functioning properly, check the following:

- Primary voltage is between 200-240 VAC
- Secondary voltage is 12 VDC
- Output current is 8.33 Amps or less
- Power supply is not overloaded (see power supply capacity chart in product installation guide or SloanLED.com)
- There are no shorts in secondary wiring
- All secondary connections are RED-TO-RED and BLACK-TO-BLACK

SloanLED products carry a limited warranty.

For complete details refer to the warranty policy found at SloanLED.com



Some or all of the products shown are covered by U.S. and foreign patents pending and covered by one or more of the following U.S. patents issued: 6776504, 6969179, 7192157, 6932495, 7241031

Customer service and technical support

SloanLED Headquarters

5725 Olivas Park Drive, Ventura, CA, USA

888.747.4LED (888.747.4533) • info@SloanLED.com

SloanLED Europe b.v.

Argonstraat 110, 2718 SN Zoetermeer, NL

+31 88 12 44 900 • Europe@SloanLED.com

SloanLED.com

P/N 403040 Rev A 2022-02-28