

PetroLuma

LED canopy fixture
LCG-GS

- Tier 1 LED for high luminous efficiency and long life
- Cast aluminum design for better cooling and durability
- Excellent optical design
- Ideal for petroleum canopies, walkways, schools

Specifications

Electrical

System power 95 W
Input voltage 100-277 VAC, 347-480 VAC*
System efficacy 123 lm/W
Power factor >0.95

Lighting

Light output 11,700 Lumens
Beam angle 111°
Color temperature (CCT) 5000 K
Color rendering (CRI) >70

Performance

Operating temperature -30° C to +45° C
Ingress protection IP65
UL location rating Suitable for wet locations
Life rating L₇₀@ >50,000 hours
Dimming 1-10 VDC control on power supply

Construction

Body Die cast aluminum
Finish White powder paint
Dimensions 16.5 in (420 mm) square x 1.6 in (41.5 mm)

Documentation

Warranty 5-year limited and Performance+ Turnkey Service Warranty†
Agency listings CE, cULus, FCC

* Available by special order, please contact SloanLED for lead times.
 † Performance+ Turnkey Service Warranty applies to U.S. & Canada installations ONLY.

SloanLED Headquarters
 5725 Olivas Park Drive, Ventura, CA, USA
 805.676.3200 • info@SloanLED.com


SloanLED Europe b.v.
 Argonstraat 110, 2718 SN Zoetermeer, NL
 +31 88 12 44 900 • europe@SloanLED.com



SloanLED.com



Visit product page for details.



Ordering information

Part number


Example: LCG-GS-95W-U-50K-WT-D1

LCG-GS-95W- -50K-WT-D1

Voltage


Code	Description
U	100-277 VAC
H	347-480 VAC

Dimensions



Photometrics

(1) Vertical Plane (2) Horizontal Cone

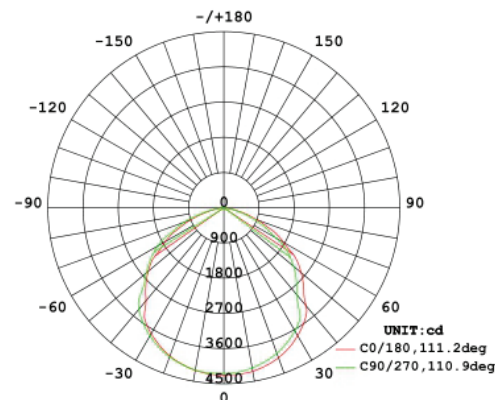

SloanLED[®]
 A Principal Industries Company