


PosterBOX Mini

Side illumination for shallow or narrow light boxes

Specifications

Part number	701946-6WMLP1
Dimensions L x W x H	38 mm x 30 mm x 14 mm (1.5 in x 1.2 in x 0.6 in)
LEDs per module	1
Viewing angle	15 x 40°
Module spacing	188 mm (7.4 in) center-to-center
Operating temperature	-40° C to +60° C
Protection class	IP66
Power per module	1.2 W
Efficacy	87 lm/W
Power capacity	45 modules per SloanLED 60 W 12 VDC power supply
Binning	MacAdam Step 3
Fastening	Peel-n-stick and mechanical
Packaging	60 modules per bag, 10 bags per carton
Color temperatures	6500 K
Lumens per module	104

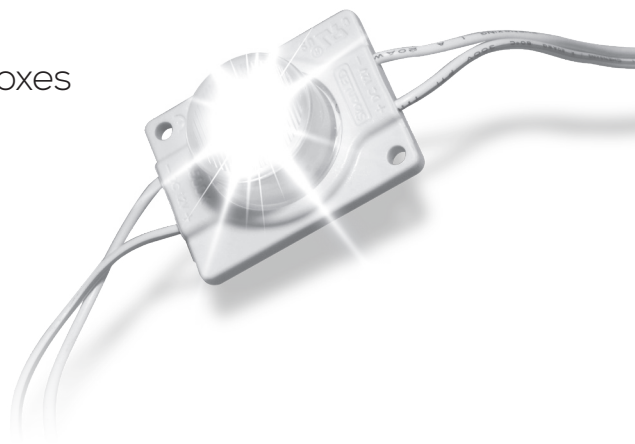

Power Supply Capacity

12 VDC Power supply*	Maximum modules
Modules per meter/foot	5.31/ 1.62
25 W Power Supply	19
60 W Power Supply	45
120 W Power Supply	2 x 45
Power used per module	1.2 W

* Configured for Class 2 Output.



The SloanLED PosterBOX™ product family is licensed by Signify (formerly Philips Lighting) in relation to the following patents: North America: US7841733. Europe: EP1938298, NL1030161, NL2000273, DE202006020673.6. Asia: CN101300616. PosterBOX products are licensed under Signify's EnabLED program when bought as a PosterBOX lighting kit solution including a SloanLED power supply. Final application in which PosterBOX lighting kit solution is installed is covered by SloanLED's licensing agreement with Signify and free from any further royalties relating to the patents listed above.

SloanLED Headquarters

5725 Olivas Park Drive, Ventura, CA, USA
805.676.3200 • info@SloanLED.com

SloanLED Europe b.v.

Argonstraat 110, 2718 SN Zoetermeer, NL
+31 88 12 44 900 • europe@SloanLED.com



SloanLED.com

© 2020 SloanLED Rev G 2020-11-23



Visit product page
for details.

Specifications subject to change without notice.

 **SloanLED®**
Leaders in LED Technology