


# PosterBOX Mini

Side illumination for shallow or narrow light boxes

## Specifications

- Part number ..... 701946-6WMLP1
- Dimensions L × W × H ..... 1.5 in × 1.2 in × 0.6 in  
(38 mm × 30 mm × 14 mm)
- LEDs per module ..... 1
- Viewing angle ..... 15 × 40°
- Module spacing ..... 7.4 in (188 mm) center-to-center
- Operating temperature ..... -40° C to +60° C
- Protection class ..... IP66
- Power per module ..... 1.2 W
- Efficacy ..... 87 lm/W
- Power capacity ..... 45 modules per SloanLED 60 W 12 VDC power supply
- Binning ..... MacAdam Step 3
- Fastening ..... Peel-n-stick and mechanical
- Packaging ..... 60 modules per bag, 10 bags per carton
- Color temperatures ..... 6500 K
- Lumens per module ..... 104

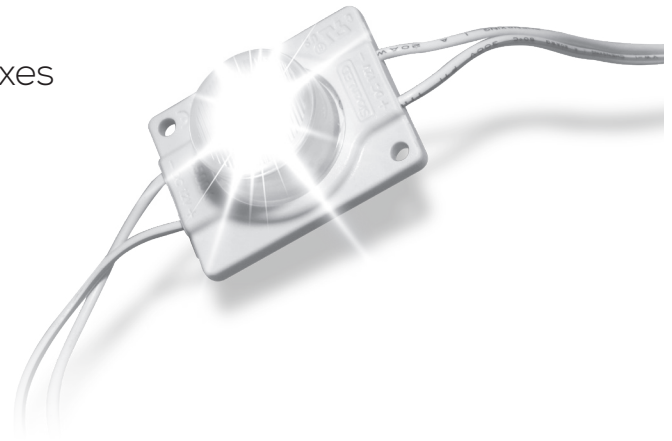

## Power Supply Capacity

12 VDC Power supply*	Maximum modules
Modules per foot/meter	1.62/5.31
20 W Power Supply	15
60 W Power Supply	45
120 W Power Supply	2 × 45
Power used per module	1.2 W

\* Configured for Class 2 Output.



The SloanLED PosterBOX™ product family is licensed by Signify (formerly Philips Lighting) in relation to the following patents: North America: US7841733. Europe: EP1938298, NL1030161, NL2000273, DE202006020673.6. Asia: CN101300616. PosterBOX products are licensed under Signify's Enabled program when bought as a PosterBOX lighting kit solution including a SloanLED power supply. Final application in which PosterBOX lighting kit solution is installed is covered by SloanLED's licensing agreement with Signify and free from any further royalties relating to the patents listed above.

**SloanLED Headquarters**  
5725 Olivas Park Drive, Ventura, CA, USA  
805.676.3200 • info@SloanLED.com

**SloanLED Europe b.v.**  
Argonstraat 110, 2718 SN Zoetermeer, NL  
+31 88 12 44 900 • europe@SloanLED.com



SloanLED.com

© 2020 SloanLED Rev G 2020-11-23



Visit product page for details.

Specifications subject to change without notice.

