

Quantum 150 W Power Supply

Wet/damp/dry-rated power supply

12 VDC **24 VDC**

701895-150E1




701507-150EB1


- European input voltage – 200 - 240 VAC, 50-60Hz
- Constant voltage output: Dual 12 VDC – 6.25 A each (701507-150EB1), 24 VDC (701895-150E1)
- Auto-resetting – No fuses to replace or circuit breaker to reset – Short circuit protection automatically resets when short condition is corrected (701895-150E1 only*)
- Approved CE by Third Party Test Lab
- Simple secondary hook-ups – No minimum load or load balancing required
- 5-year product and limited labor warranty
- Rugged and compact

Wiring diagram

12 VDC (701507-150EB1)

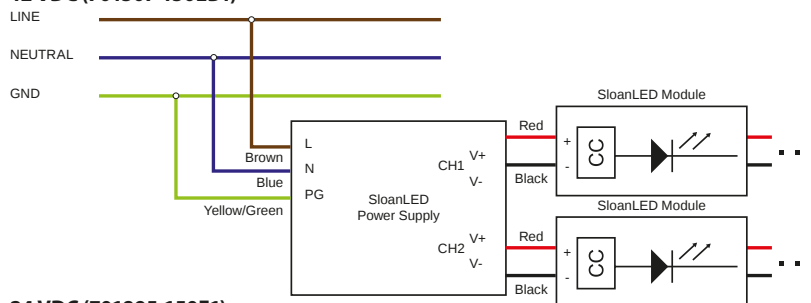

24 VDC (701895-150E1)

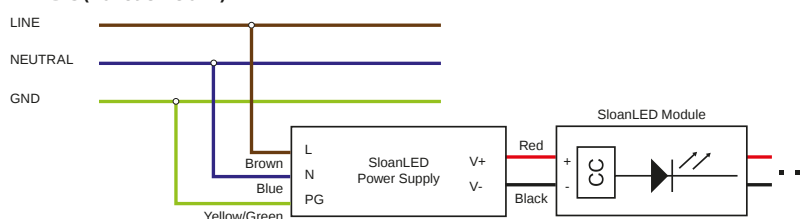

In the end application, the maximum case temperature (T_c) shall not be exceeded 90° C.

The product is intended for IP68 environment.



* For 701507-150EB1, turn input AC OFF/ON to reset if OCP occurs.



Wet/damp/dry-rated power supply

Quantum 150 W Power Supply



Wet/damp/dry-rated power supply

12 VDC **24 VDC**

Dimensions



12 VDC (701507-150EB1)

Weight: 0.91 kg

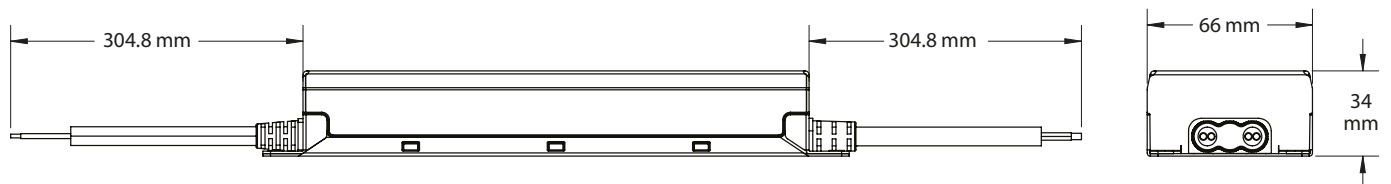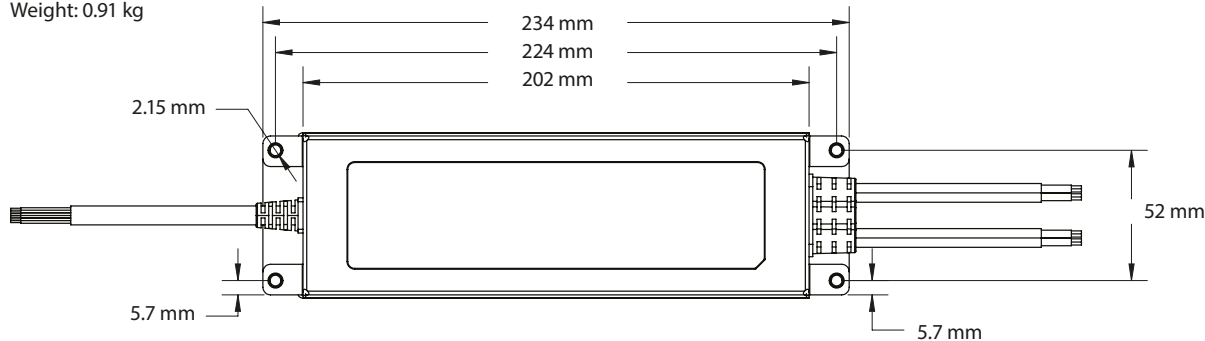

24 VDC (701895-150E1)

Weight: 0.91 kg

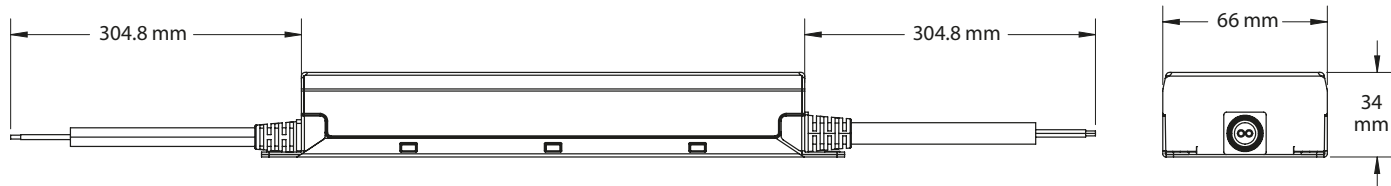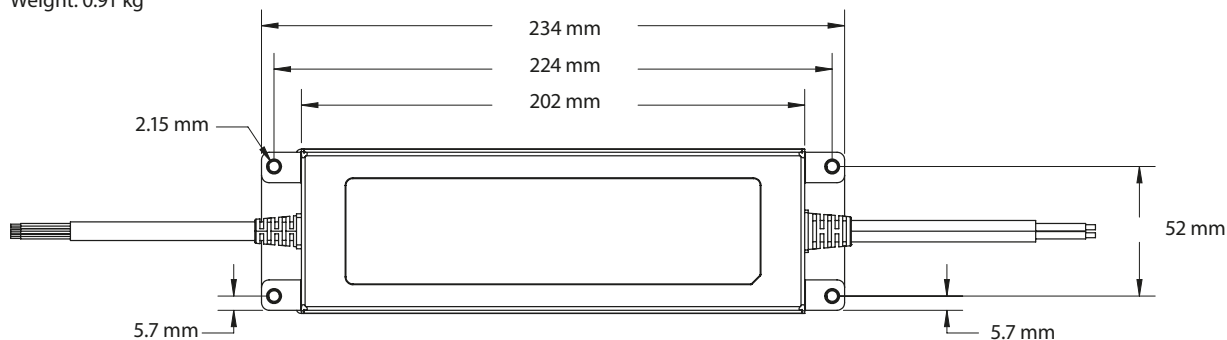

SloanLED Headquarters

5725 Olivas Park Drive, Ventura, CA, USA
805.676.3200 • info@SloanLED.com

SloanLED Europe b.v.

Argonstraat 110, 2718 SN Zoetermeer, NL
+31 88 12 44 900 • europe@SloanLED.com



SloanLED.com

Specifications subject to change without notice.
© 2022 SloanLED Rev C 2022-08-30



Visit product page
for details.

Specifications subject to change without notice.

