

Street Wrap™ Flex Side-Bend

Flexible LED illumination



Specifications


Dimensions L × W × H	7.3-m and custom lengths available
Input	24 V
Min. bend radius	60 mm
Power	12W/m
Operating temperature	-40° C to +65° C
Environment	IP67
Power supply	24V
Run footage	Max. 7.3 m
Applications	Neon tube light source, building and sign outline lighting and cover lighting, indoor/outdoor, cursive letters and design
Warranty	5-year Product / 5-year Labor

Perfect for cursive letters and various designs

Bends side-to-side

Dual-color silicone extrusion

UV-resistant

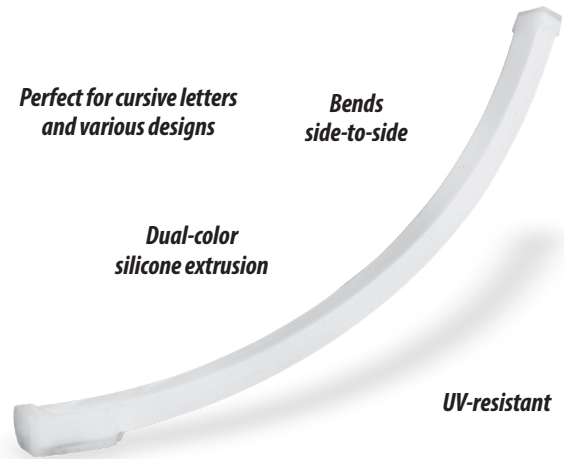


Product Options


CCT/color	Jacket color	Lm/m	Cut section length	Max. length/96 WPS	W/max. length	Part number
6500 K	White	3282	100 mm	7300 mm	87.7	M-SV024-65
5000 K						M-SV024-50
4000 K						M-SV024-40
Red (623 nm)						M-SV024-RD
Orange (609 nm)	Orange	1249				M-SV024-OR
Yellow (509 nm)	Yellow	1701				M-SV024-YL
Green (525 nm)	Green	1507				M-SV024-GR
Blue (468 nm)	Blue	215				M-SV024-BL
Cyan	White	388	83 mm	7304 mm	87.7	M-SV024-CN
Pink		183				M-SV024-PK
RGB		N/A				M-SV024-3C

Wiring

Single color product

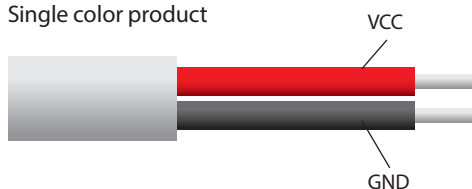

RGB product

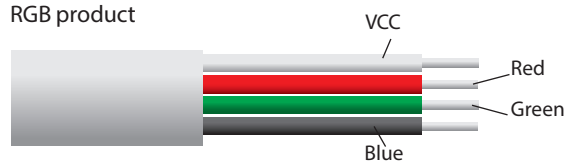


Street Wrap™ Flex Side-Bend

Flexible LED illumination




Accessories



Transparent PC clips*

A-SVMH-CLPL


* Transparent clips are not warranted if used in outdoor applications.



1.2 & 2.4-m Aluminum mill finish extrusion for outdoor applications


1.2-m: A-SVMH-TRAL-4

2.4-m: A-SVMH-TRAL-8

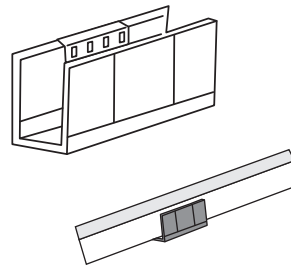

Aluminum mill finish clips for outdoor applications

A-SVMH-CLAL

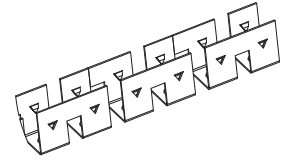

Stainless steel chain for curve installation

A-SVMH-CHSS


End Caps

End cap quantities are available upon request.



Silicone end cap

A-SVHW-ECSI



Silicone insert, single color

X-C-SV-SI1C



Silicone insert, RGB

X-C-SV-SI3C








Silicone glue

A-SWFX-SA

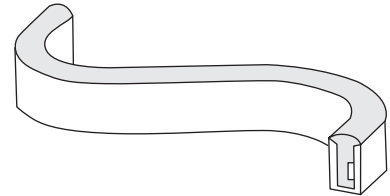

Types of Feed

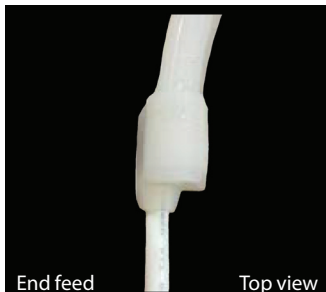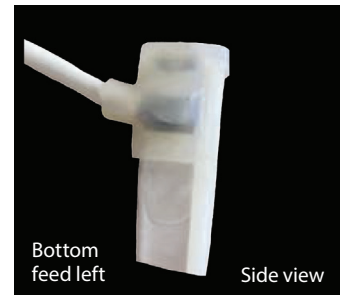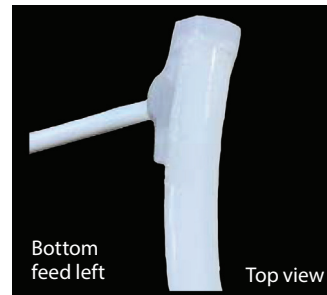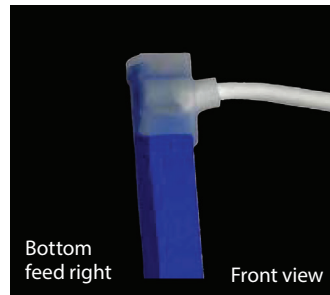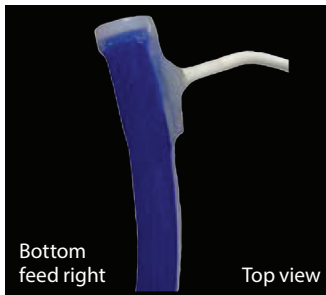

SloanLED Headquarters

3490 Venture Dr., San Angelo, TX, USA
325 227 4577 • info@SloanLED.com

SloanLED Europe b.v.

Argonstraat 110, 2718 SN Zoetermeer, NL
+31 88 12 44 900 • europe@SloanLED.com



SloanLED.com



© 2025 SloanLED Rev B 2025-10-01

Specifications subject to change without notice.

SloanLED®
A Principal Industries Company